




Thermal transfer ribbon for Near Edge printers

Excellent printing quality
Excellent resistance to smudge
and scratch
High versatility


1707 PREMIUM Resin

Blackness


Macbeth D19C (Optical Density by Reflection)



90° barcode

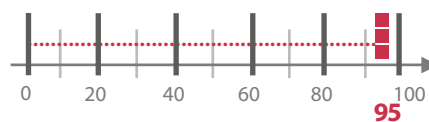


Sharpness



Label compatibility

Coated papers	<input type="checkbox"/>	PP	<input checked="" type="checkbox"/>
Glossy coated	<input checked="" type="checkbox"/>	PE	<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	PET	<input checked="" type="checkbox"/>


Printing speed

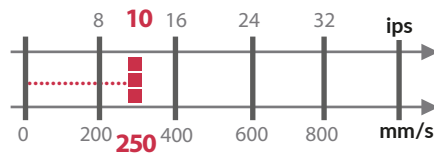


Printhead energy




Smudge resistance

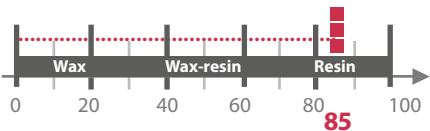

Heat resistance



Solvent resistance



RIBBON STRUCTURE

Ink: Resin
Color: Black
Melting point: 80°C
Ribbon thickness: <9µm
PET film thickness: 4,5µm

CERTIFICATIONS

REACH/SVHC 1907/2006/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Humidity: min 20%, max 80%