




## Thermal transfer ribbon for Flat Head printers

Excellent printing quality  
High resistance to smudge  
Excellent versatility


# 1701 PREMIUM Wax-Resin

### Blackness


Macbeth D19C (Optical Density by Reflection)

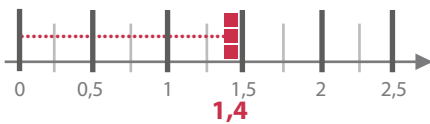

### 90° barcode

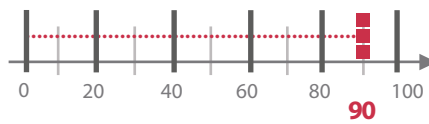


### Sharpness

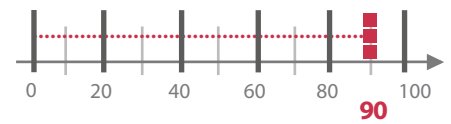

### Label compatibility

Vellum paper	■ ■ ■	PP	■ ■ ■
Coated papers	■ ■ ■	PE	■ ■ ■
Glossy coated	■ ■ ■	PET	■ ■ ■


### Printing speed

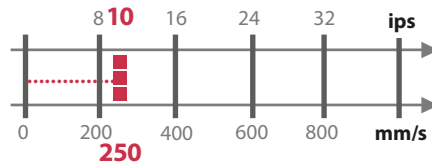


### Printhead energy




### Smudge resistance

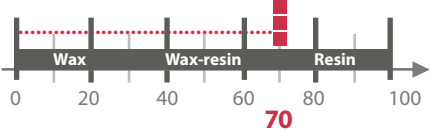

### Heat resistance

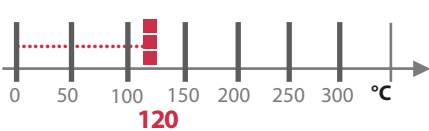

### Solvent resistance



### RIBBON STRUCTURE

Ink: Wax-Resin  
Color: Black  
Melting point: 84°C  
Ribbon thickness: <9µm  
PET film thickness: 4,5µm

### CERTIFICATIONS

REACH/SVHC 1907/2006/EC  
EC Food Contact 1935/2004/EC  
Heavy metals 2011/65/EU  
California Proposition 65  
Halogen restrictions

### STORAGE CONDITIONS

12 months  
Temperature: min 5°C, max 35°C  
Humidity: min 30%, max 85%