




Thermal transfer ribbon for Flat Head printers

Very good printing quality
Competitiveness
Excellent versatility


1710 STANDARD Wax-Resin

Blackness


Macbeth D19C (Optical Density by Reflection)



90° barcode

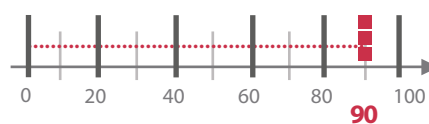


Sharpness



Label compatibility

Vellum paper		PP	
Coated papers		PE	
Glossy coated		PET	


Printing speed

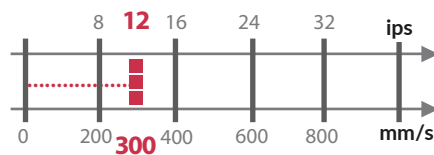


Printhead energy




Smudge resistance

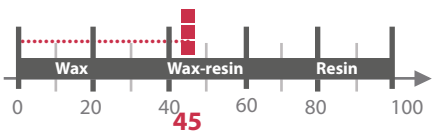

Heat resistance



Solvent resistance



RIBBON STRUCTURE

Ink: Wax-Resin
Color: Black
Melting point: 77°C
Ribbon thickness: <8,5µm
PET film thickness: 4µm

CERTIFICATIONS

REACH/SVHC 1907/2006/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Humidity: min 20%, max 80%