


# PR 16

## External rewinder Compa III 162 & Compa V 162

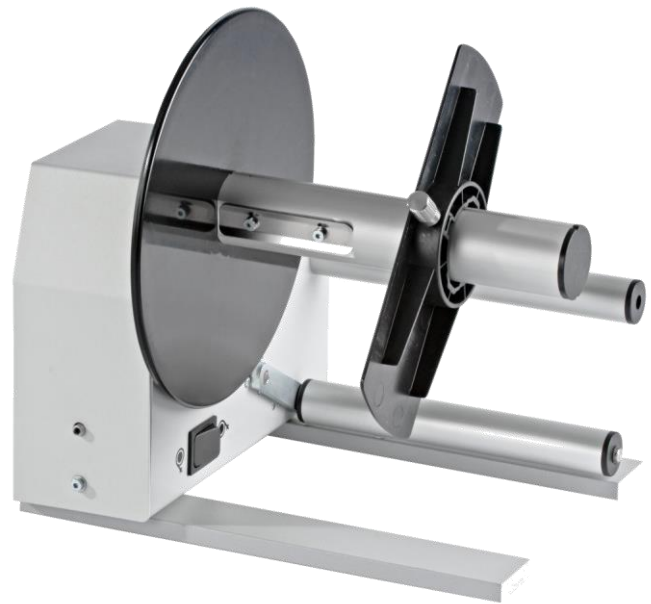

The rewinder PR 15 is fixed with the printer and screwed with a direct connection. The regulation by the pendulum provides an even and tight winding.

For the processing of larger print orders it is possible to take up label rolls up to a diameter of 205 mm and rewind the labels independent of the printer.

### Specifications

<b>Label roll</b>		<b>Weight</b>	3.5 kg
max. rewind diameter	205 mm	<b>Connection values</b>	
max. label width	180 mm	nominal voltage	24 VDC
<b>Label winding</b>	outside/inside	<b>Operating conditions</b>	
<b>Rewind speed</b>	max. 300 mm/s	operating temperature	10 ... 35 °C by air humidity 30 ... 85 % not condensing
<b>Rotating direction</b>	switchable	storage and transport temperature	-20 ... 50 °C by air humidity 10 ... 85 % not condensing
<b>Core diameter</b>	40 mm on cardboard core 40 mm on winder axis 76 mm on cardboard core by adapter (included)	<b>Item no.:</b>	<b>92.42.200</b>
<b>Dimensions</b>			
height x width x depth	280 x 320 x 270 mm		

Subject to change